

# FLEXAMOR

## SILENTFLEX®



# DESCRIPTION

The **flexamor** is a silentblock formed by a layer of natural rubber reinforced on the outside and by rows of steel on the inside that give it a high resistance in a very small size. It has also gone through a vulcanization process that gives it a much higher general resistance.



It has a wide range of advantages due to its special characteristics and unique design:

- It is capable of isolating a machine that generates vibrations or shocks.
- Protects the machine from vibrations or external shocks that can affect and damage it.
- Gives great damping power and protection against noise and vibrations in a very small size.
- It has a design with flexibility, lightness and resistance to the weather without any maintenance, it is waterproof and very resistant to greasy oils etc.
- It is very easy to install.

The flexamor has a great versatility which allows it to have numerous applications such as motors, fans, generators, cutting tools, presses, cranes, etc.



# TECHNICAL AND DIMENSIONAL CHARACTERISTICS

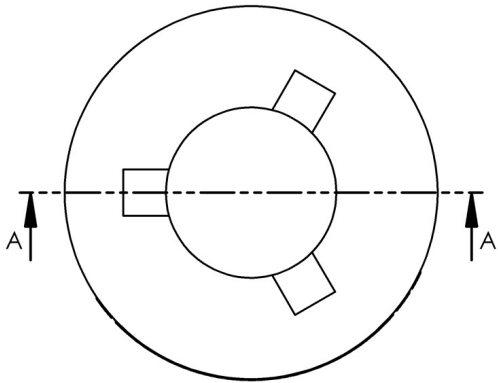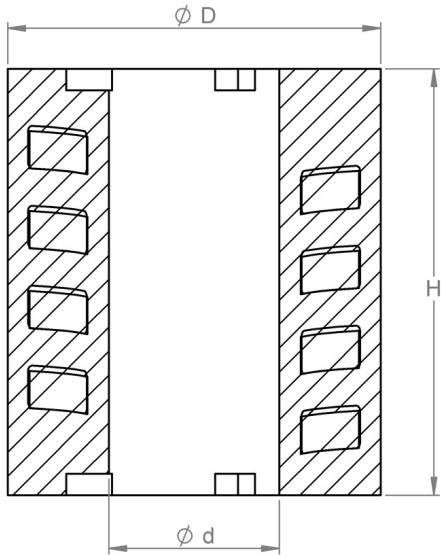

References in blue are usually in stock, the rest can have a longer delivery time and may require minimum quantity to order.

Code	Dimensions					
	Ø D	Ø d	H	Peso	Ø Ext. Max	Ø Int. Min
1/2 A 0	31,5	16	14	0,015	38	13
A0	31,5	16	32,5	0,035	38	12
1/2 A 1	35	16	19	0,035	42	11
A1	35	16	42	0,070	45	10
1/2 A 2	48,5	28	26,5	0,095	56	22
A2	48,5	28	56	0,195	58	20
1/2 A 3	63	33	30	0,175	71	21
A3	63	33	66	0,370	73	21
1/2 A 8	72	43	39	0,265	80	30
A 8	72	43	81	0,550	83	31
1/2 A10	97	57	44	0,520	110	44
2/3 A10	97	57	66	0,800	113	49
A10	97	57	101	1,100	117	30
1/2 A20	128	69	68	2,120	145	52
2/3 A20	128	69	96	2,800	145	52
A20	128	69	143	4,050	145	52
A30	170	89	127	6,600	185	75
A50	205	120	166	9,500	239	94
A100	270	180	132	11,800	306	149
A150	380	260	158	22,650	430	217
1/2 A 200	400	260	109	20,500	464	200
A 200	400	260	208	41,100	464	200



# CONTACT

## Address:

C/ Industria 77, Parque empresarial Tirso G. 21 - 39610 El Astillero - Cantabria-Spain.

## Phone:

0034-942 544 223

## E-mail:

[tejasa@tejasa.es](mailto:tejasa@tejasa.es)

## Web:

[www.silentflex.com](http://www.silentflex.com)

